

DRY WELL DETAIL (TYP)
 N.T.S.

NOTE: INSTALL WITH REMOVABLE
 16" Ø OPEN GRATE

X (00.00)	PROPOSED ELEVATION
TC / BC	TOP / BOTTOM OF CURB
	(5) EXTERIOR LUMINAIRES
	ROOF LEADER WITH DRAINAGE TO DRYWELL
	(2) 6'-0" HIGH GATE
	EXISTING GAS VALVE
	DRYWELL EACH 6'-0" UNDER DRIVEWAY.
	INSTALL SWALE TO DRAIN WATER FROM REAR FRONT OF PROPERTY
	EXISTING TREE
X (00.00)	PROPOSED ELEVATION

HAMILTON

S 86°45' ↑

82.00'

S 4°56' E ←

P.O.B. S 85°04' W ↑

0.55'

26.32' ↓

C.L. FENCE

28' 6.1' 5.7' 28'

BLUESTONE CURB
G G


TC=26.08
BC=25.77



10" COMB. SEWER

ONE WAY


PATTERSON

RM=19.93
INV=8.93 (S)



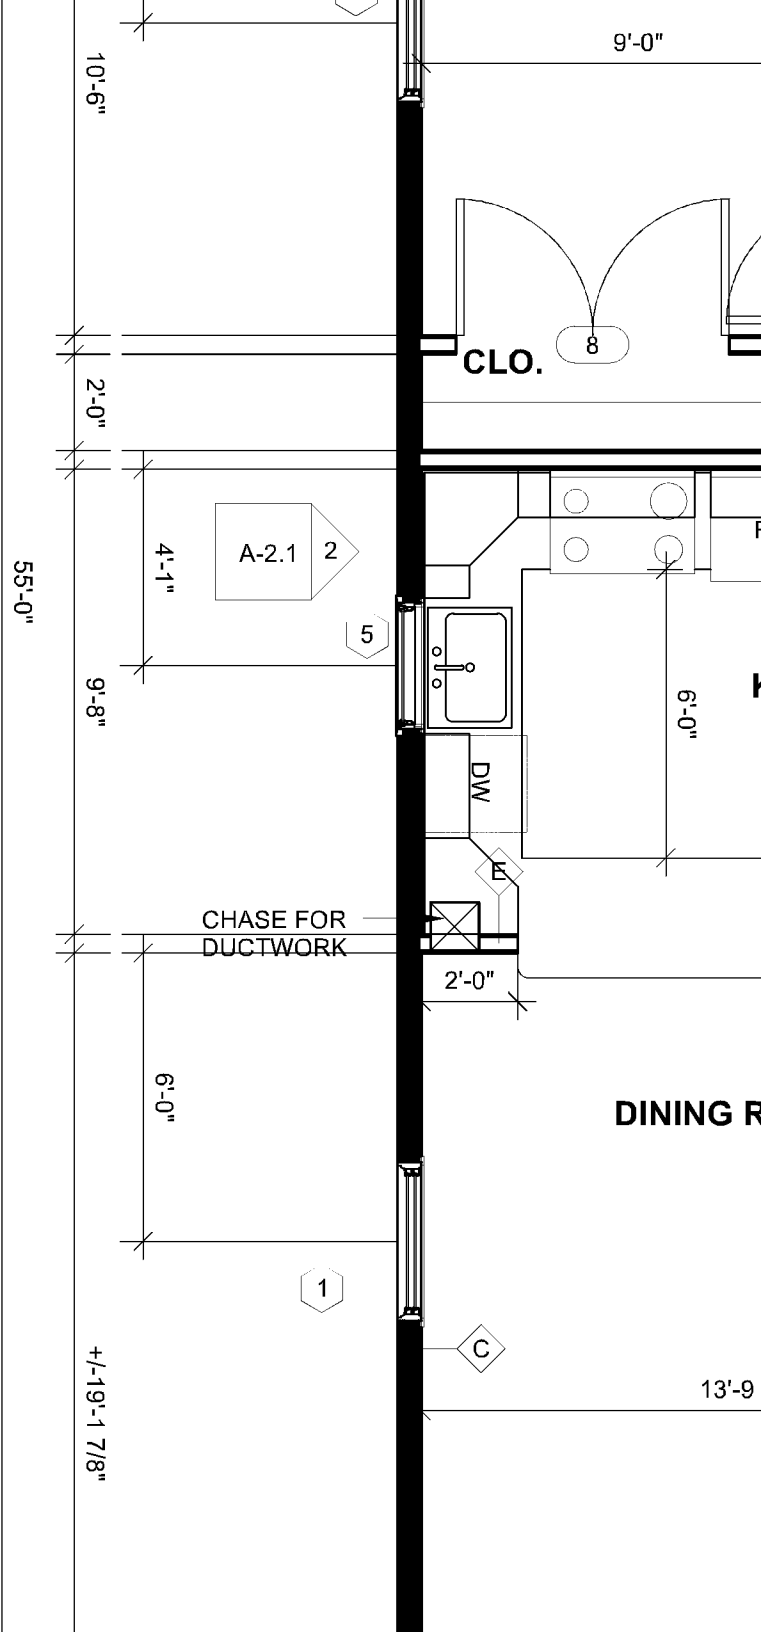

5" / 12"



54'-7 3/8"

55'-0"

8'-0"

4 3/4"

1'-7 1/4"

4 3/4"

15'-4"

4 3/4"

10'-5 1/4"

35.00'(BLDG. HEIGHT PER ZONING ORDINANCE)

THIRD FLOOR CEILING

29.58'

THIRD FLOOR

20.58'

SECOND FLOOR

10.29'

GROUND FLOOR

0.00'

THIRD FLOOR CEILING

29.58'

THIRD FLOOR

20.58'

SECOND FLOOR

10.29'

GROUND FLOOR

0.00'





9'-0"



10'-3 1/2"

10'-3 1/2"

3'-0" MIN


1'-0"



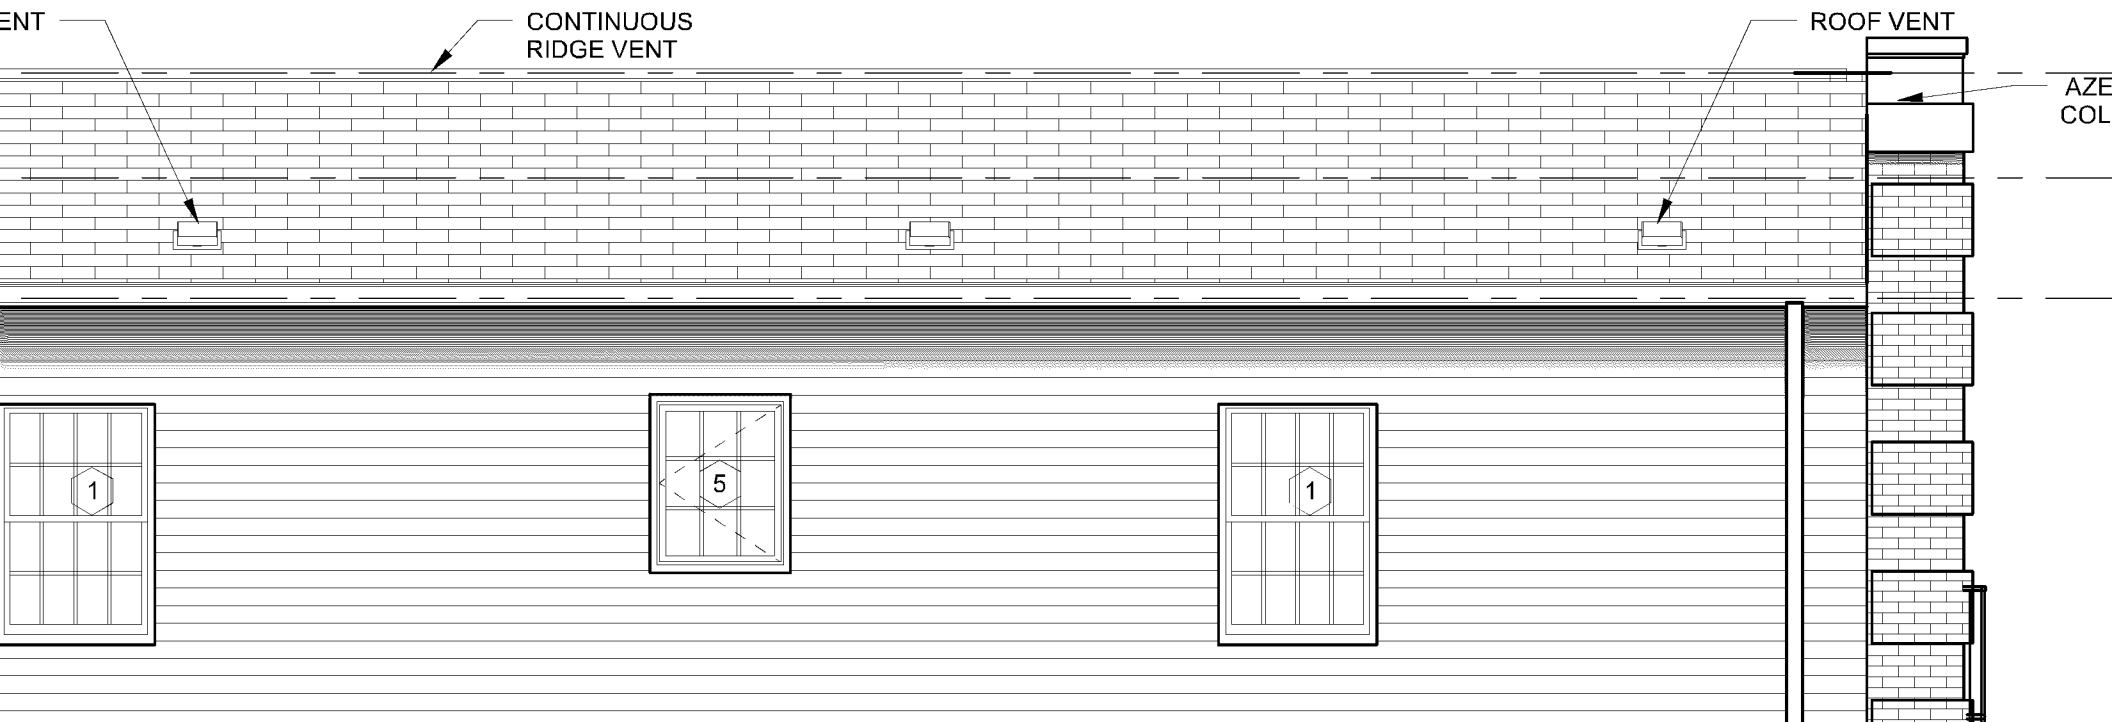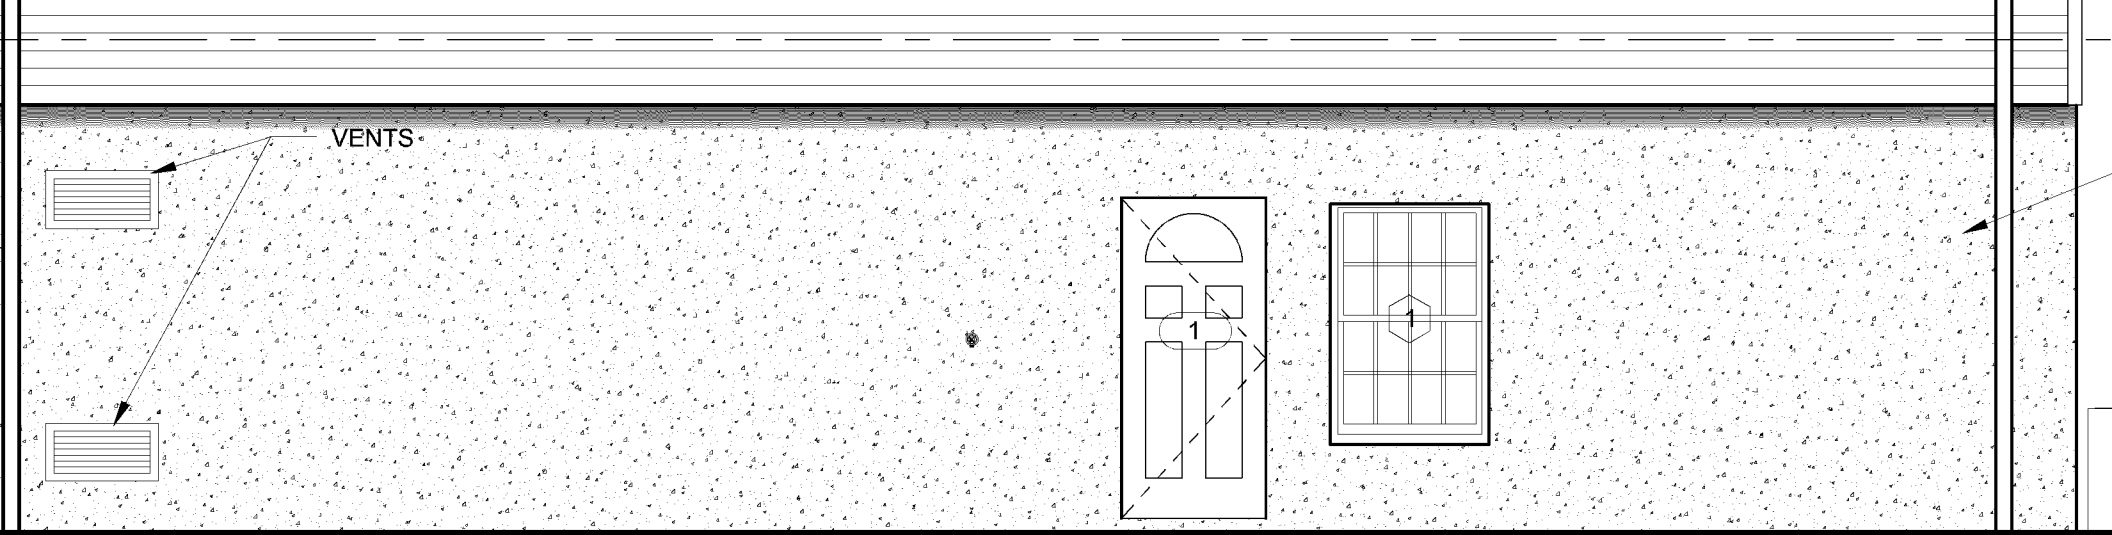


A-10.0

N.T.S.

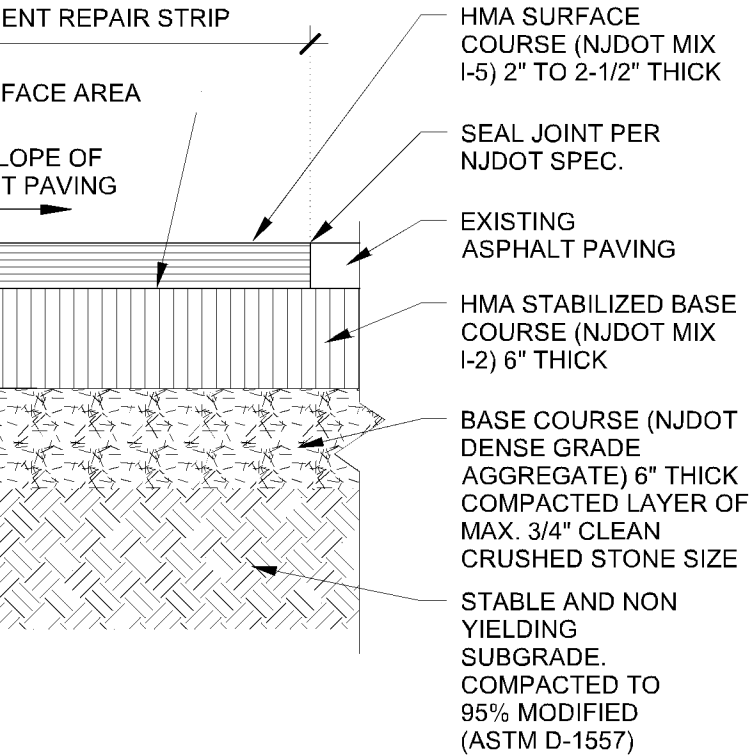

SHALL CONFORM TO N.J.D.O.T. STANDARDS AND SPECIFICATIONS AND BE APPROVED BY THE ENGINEER OR HIS REPRESENTATIVE PRIOR TO CONSTRUCTION.


FINISH AND TRANSVERSE BROOM FINISH IN DIRECTION OF TRAFFIC TO BE DONE BEFORE INITIAL SET USING A STEEL OR BARN BROOM AT CURB, AT PENETRATING STRUCTURES, AND BETWEEN CURBS. USE 1/2" WIDE PRE-FORMED EXPANSION JOINT FILLER & SEALANT. CONSTRUCTION JOINTS AT MAX. 5' O.C.

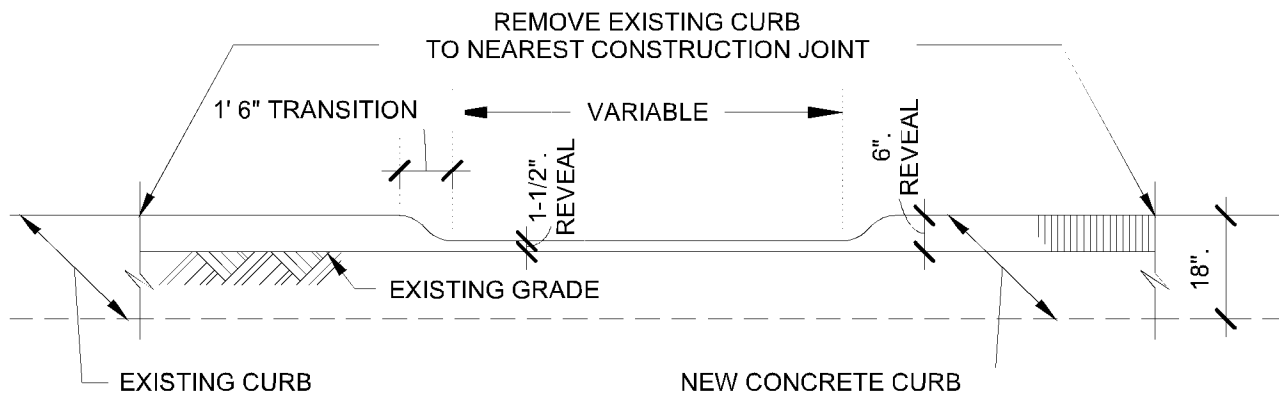

8 DEPRESSED CURB CUT AT DRIVEWAY ELEVATION

A-10.0

N.T.S.

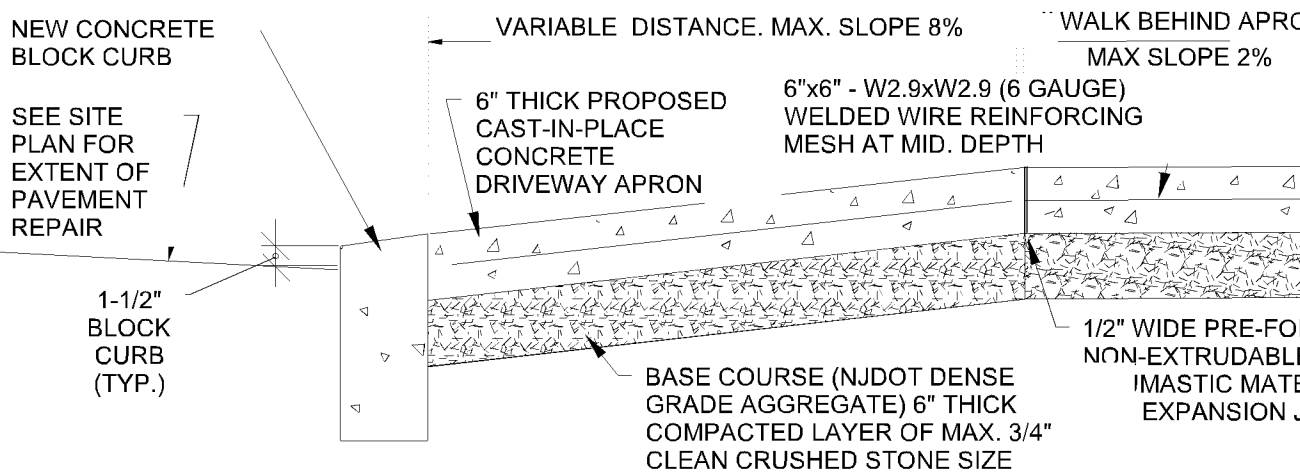

7 CURB AND PAVEMENT REPAIR STRIP

7 DEPRESSED CURB CUT AT DRIVEWAY SECTION

A-10.0

N.T.S.

